



Time setting

The professional LEDI® clocks can display the same time information, synchronized by a master clock or a time server.

Specifications

Power supply	230VAC 50/60Hz 115VAC 50/60Hz Low voltage 24VDC
Certifications	CE, EN 62368, EN 55032, EN 55035, ROHS
Maximum consumption	6 VA (simple face) 12 VA (double face)
IP	30
MTBF	56 000 h
MTTR	Display: 5 min
Weight	1,2 – 1,6 kg
Dimensions	235x145x99 mm (LxHxD) Mounting bracket: 150 mm
Digit height	Hour/minute: 50 mm
Maximal distance of legibility	25 meters
Operating temperature	-20° to 50°C
Electrical equipment classification	Class 1 (in 115 ou 230 VAC) Class 3 (in 24 VDC)

Display / LED characteristics






- Single row LED display
- SMD Technology, angle readability: 160°
 - Red 245 mcd

Key features

- Perfectly silent, direct and accurate reading of time
- SMD LED technology. Display in Red
- The patented technology of the light guide provides a perfect regularity of the brightness and viewing angle at 160°
- The front face of the LEDI® is coated with an antiglare and anti-scratch film giving an extraordinary 60000:1 level of contrast
- A protection against over-voltage and industrial interference via EMC filter
- An easy "plug and play" installation
- An anodized aluminium case wall mount or flush mount
- Its participation in the sustainable development, life span over 20 years
- 2 years warranty

Synchronisation Input

- AFNOR NFS 87500
- IRIG B to specify on purchase order

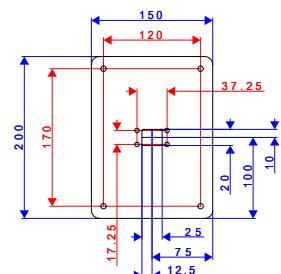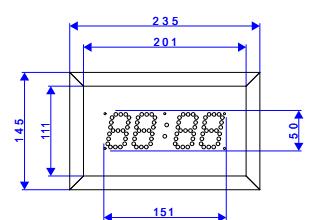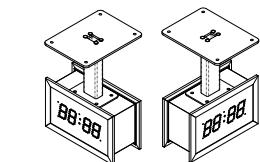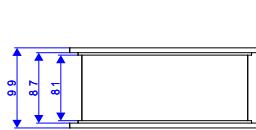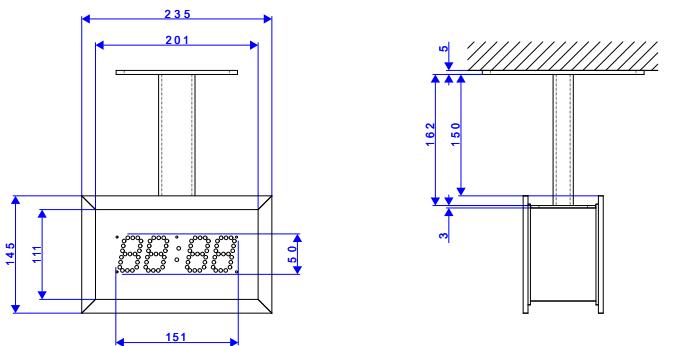

LEDI® REVERSO 5

Indoor / Double face

AFNOR NFS87500 receiver

ITEM CODE						
ND3508		/ <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>				
LED		↑	↑	↑	↑	↑
Red Colour	<input type="checkbox"/>	1				
MOUNTING						
Please refer to the brackets technical sheet					P	
COLOUR CASING						
Anodized grey aluminium	<input type="checkbox"/>				7	
Painted black RAL 9005 aluminium	<input checked="" type="checkbox"/>				0	
POWER SUPPLY						
Standard: 230VAC 50/60Hz	<input type="checkbox"/>				0	
115VAC 50/60Hz	<input type="checkbox"/>				1	
Low voltage power supply: 24 VDC	<input type="checkbox"/>				4	
OPTIONS						
Tropicalization	<input type="checkbox"/>				U	
Hour 4 sec./ date 2sec. Alternation (not configurable)	<input type="checkbox"/>				D	